


# 4-LED MODULE

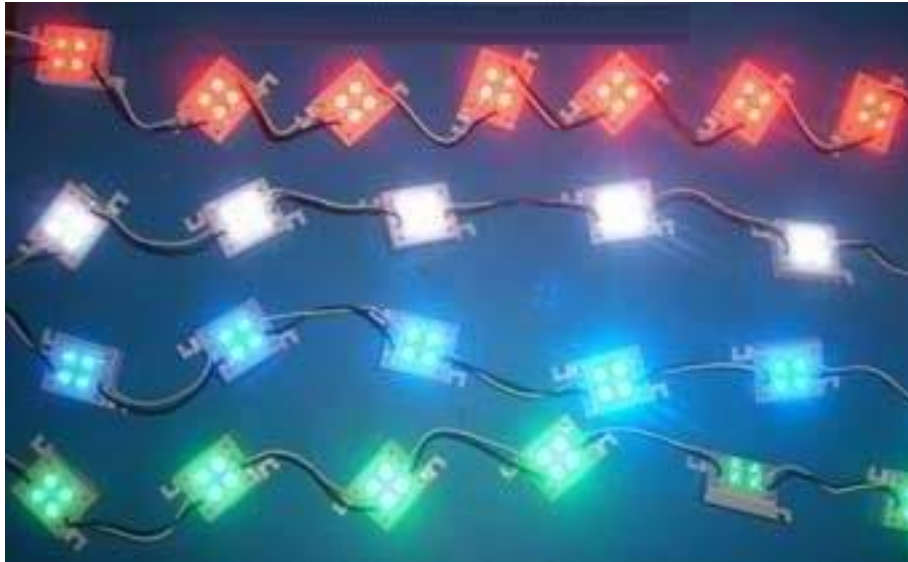

ModeINO	Description	Specification	Emitting Color	Input voltdqe	Current	Power	LM	Viewing Angel $\Delta$ $\theta$
TMT-M06-R4FF	4ledmodule	50*28*12mm	S-B Orange Red	C12V	20mA	25LM	0.4 8W	$\pm 90$
TMT-M06-Y4FF	4ledmodule	50*28*12mm	Super Bright Yellow	C12V	20mA	25LM	0.4 8W	$\pm 90$
TMT-M06-B4FF	4ledmodule	70*28*12mm	Super Bright Blue	C12V	20mA	30LM	0.4 8W	$\pm 90$
TMT-M06-G4FF	4ledmodule	70*28*12mm	Pure Green	C12V	20mA	35LM	0.4 8W	$\pm 90$
TMT-M06-W4FF	4ledmodule	70*28*12mm	Super Bright White	C12V	20mA	35LM	0.4 8W	$\pm 90$
Test condition	F=20mA	F=20mA	F=20mA	VR=5V	F=20mA			

Available in Red, Yellow, Orang, Green, Blue, White, Amber, colors  
 Low voltage, energy efficient,virtually no maintenance  
 Low heat, high beightness, works well under harsh conditions  
 Lnpud voltage: 12V DC,professionally designed to be fully waterproof  
 Lifespan of 70000 plus hours